NB SERIES

65" 75" 86" 98" 105" 110"

High-Performance, meet Interaction


RK3588 interactive screen – Innovating learning and collaboration, redefining technology for education and business








Best Performance Interactive Screen For Education And Business

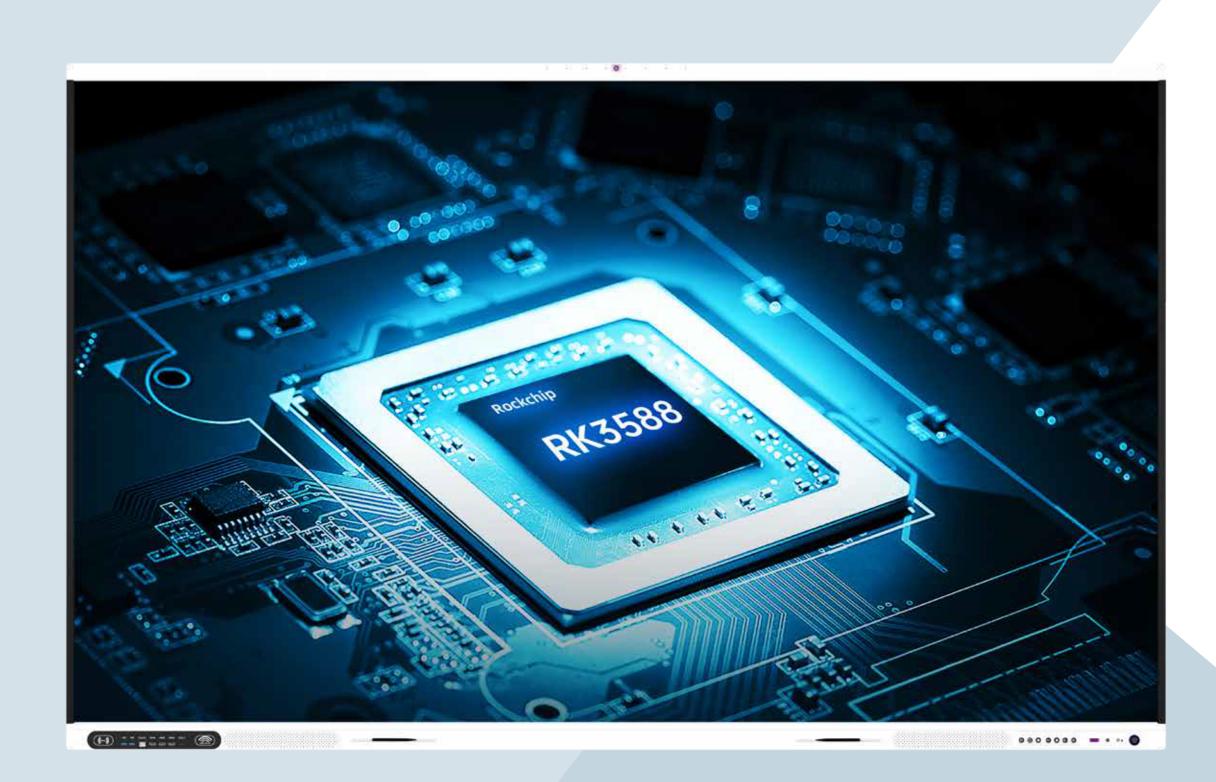
















Experience the power of an intuitive app-based user interface that makes teamwork a breeze. Whether in the classroom or the boardroom, our robust whiteboard functionality allows for real-time sharing and brainstorming, taking your productivity to new heights.



Naturally Smooth Writing with Digital Accuracy


Write, annotate, and collaborate during presentations with a pen-on-paper feel. With dual-pen recognition to support group collaboration, and Ultra Fine Touch technology and 3mm tipped pens for lag-free digital precision, offers unparalleled writing accuracy with a natural flow.

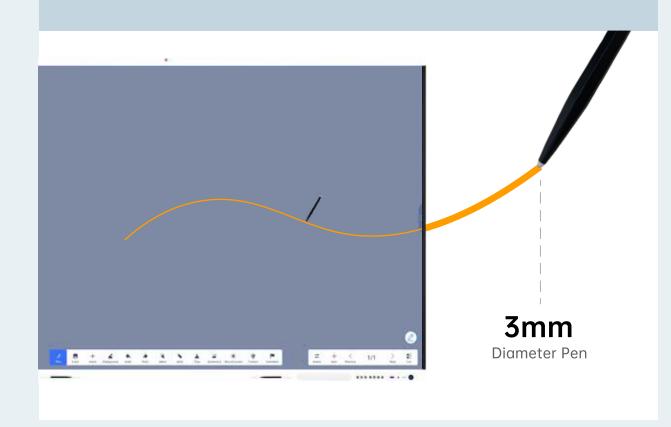




Palm Rejection

Palm recognition technology minimizes errant touch inputs from palms, wrists, sleeves, etc., so that users can write and annotate freely.

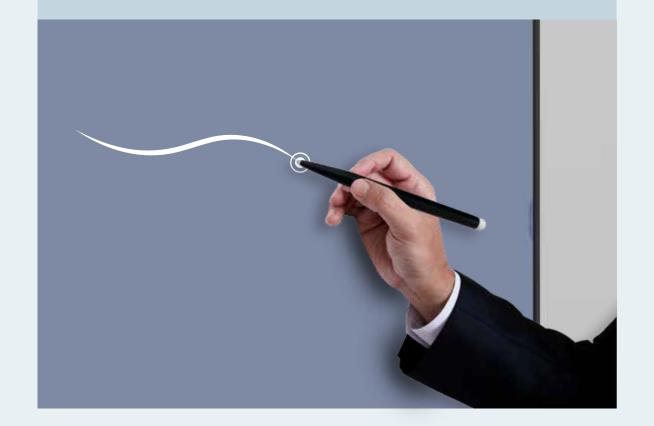


Up to 40 points of touch

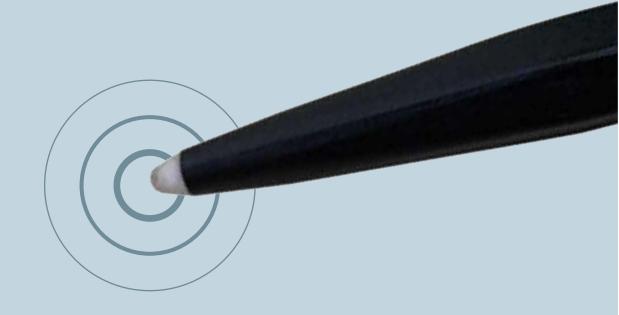

8K Resolution With Immense Picture Quality

A dynamic display range has 8k video resolution with an unparalleled visual experience offer true to life color and picture quality, enhances any classroom or meeting room experience and adds life to it.

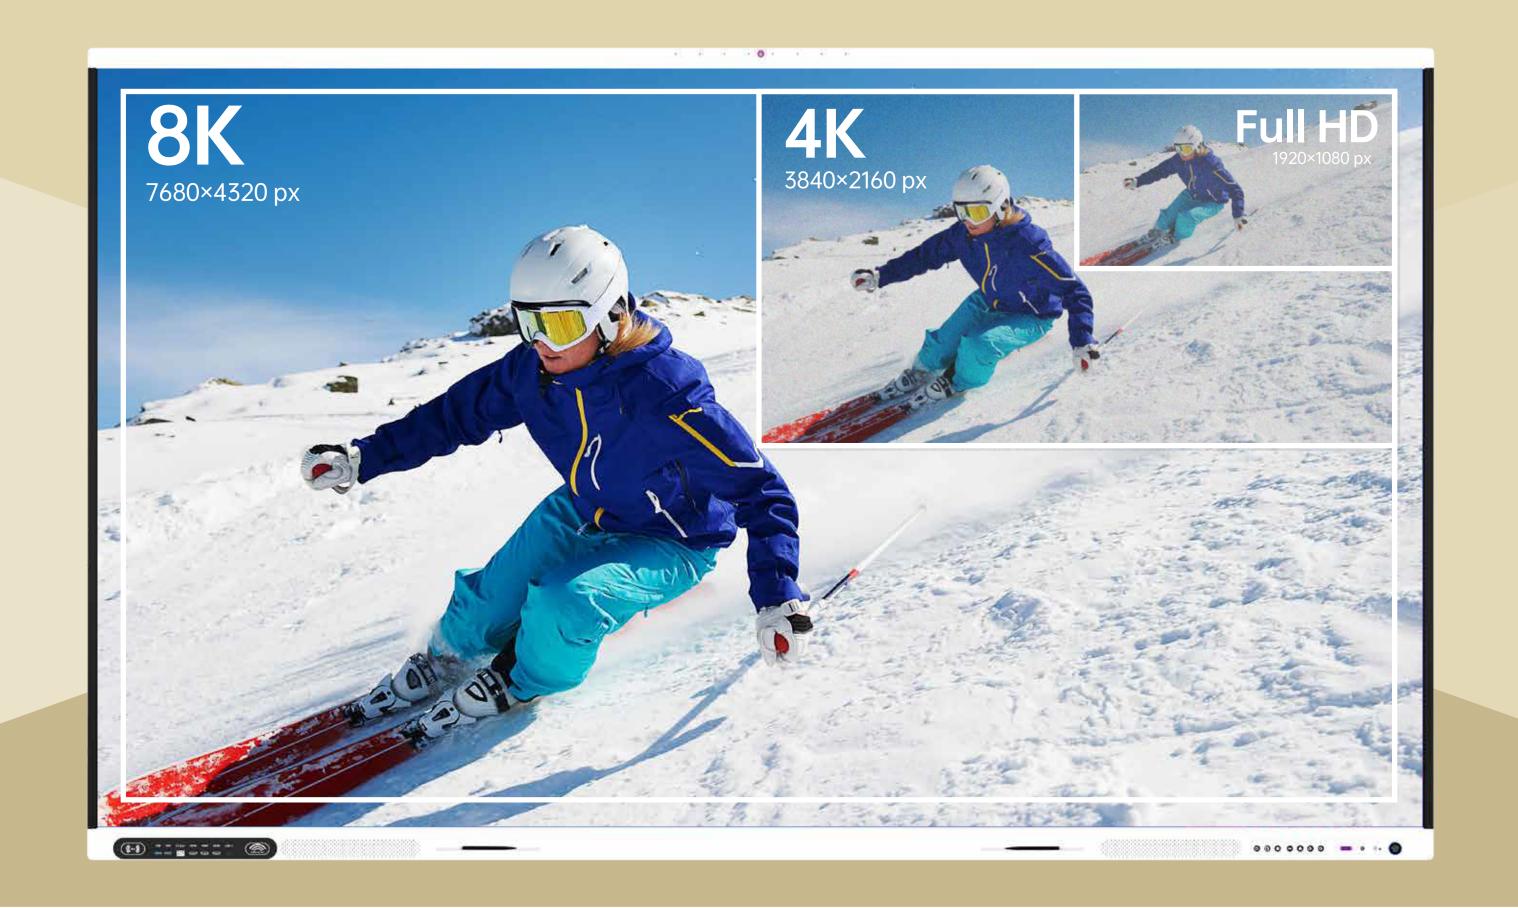

Zero Bonding

Zero boning technology ensures high precision touch and dust free clarity screens.









0.8mm Air Gap at the edge-

The Glass-

Omm Air Gap at the center

8Array Microphones with speaker tracking

8 microphones and speaker-tracking technology locate the sound source in real-time, ensuring the speaker is always the center of attention.

8Ar 10 Aloeato




48MP AI Camera Auto framing

With auto-framing, the Riotouch display automatically adjusts to achieve the best angle based on the number of participants and their location, so it feels like a face-to-face interaction.







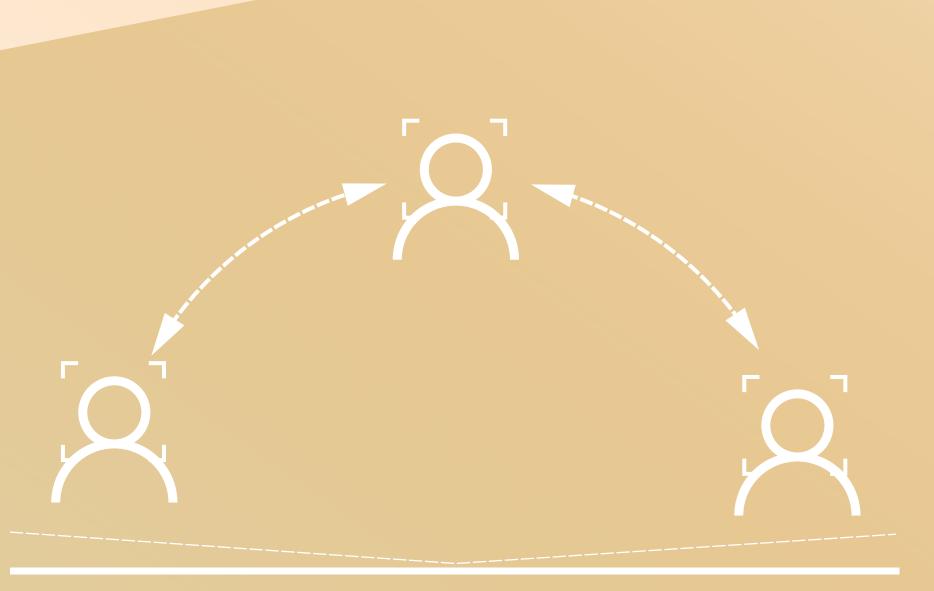



Multiple Ports




Type-C Versatile Connectivity

Experience seamless connectivity with the versatile Type-C port.

Effortlessly connect to webcams, microphones, speakers, USB flash drives, and wired networks by simply plugging in a cable. And with up to 100W of charging performance, your device stays poweredthroughout your lessons.




Transform Images into Actionable Insights

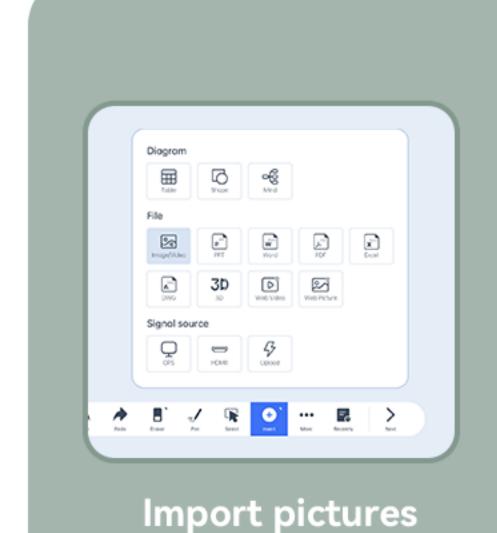


From Image to Insight
"Capture. Convert. Conquer."

"With RK3588, capturing an image is just the beginning. Convert it into text and conquer the information it holds. Whether it's documents, receipts,or notes, RK3588's OCR turns images into insights at your fingertips."

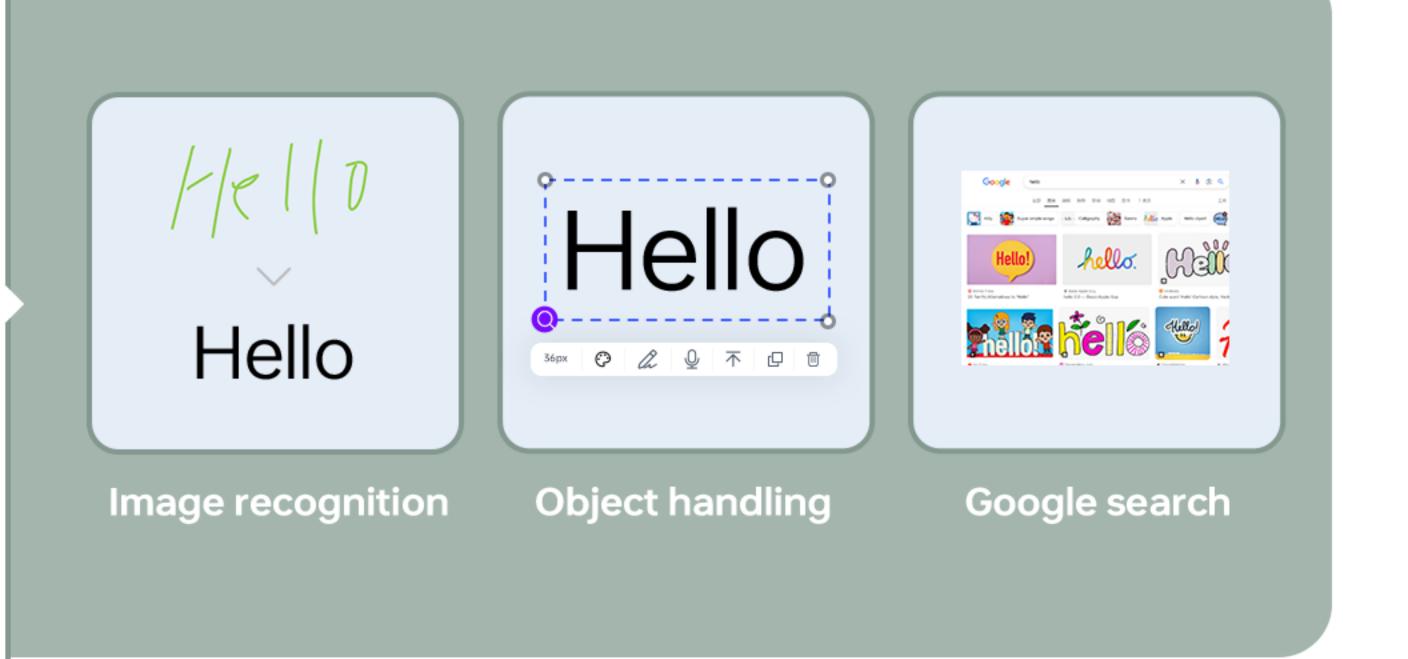


Transform Your Writing with Umind Advanced Al Pen


Al-powered pen tools, integrated into our Umind whiteboard software, offer unparalleled accuracy and intuitive functionality.

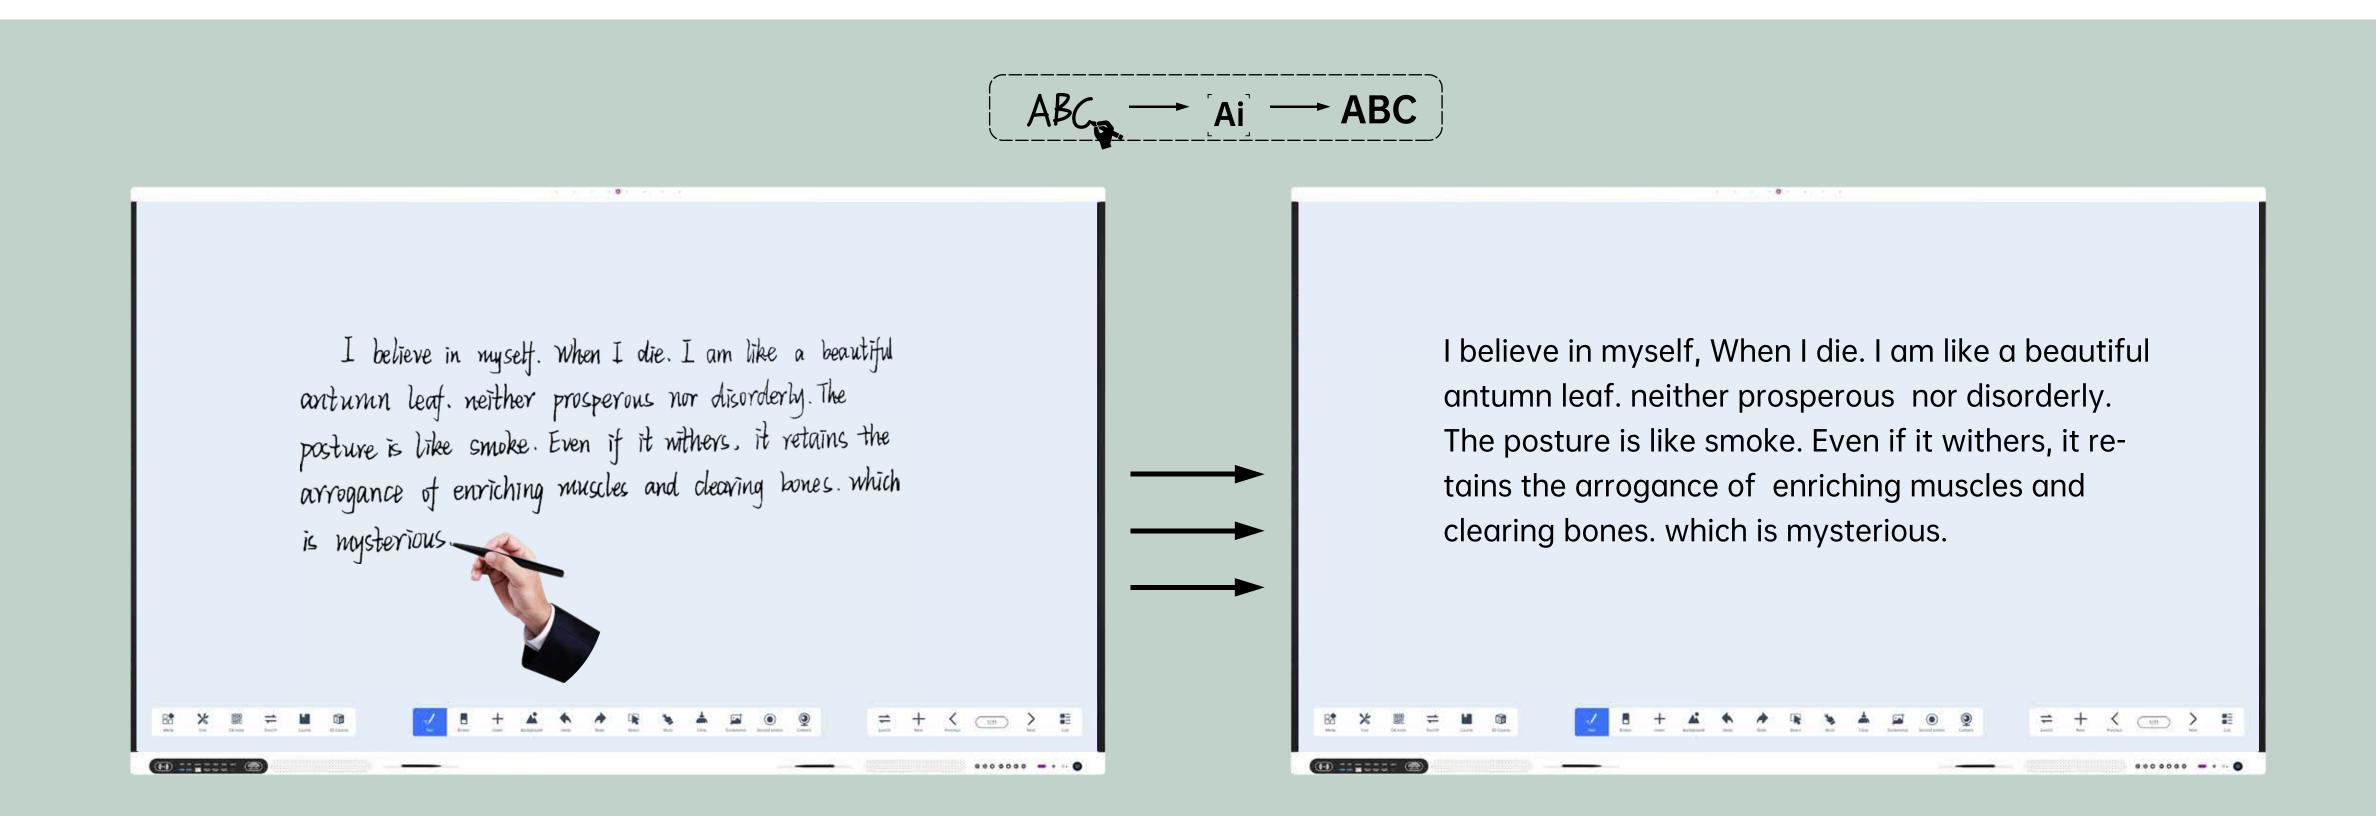

Empowering Education, Amplifying Insights

- Your gateway to a world of science and math

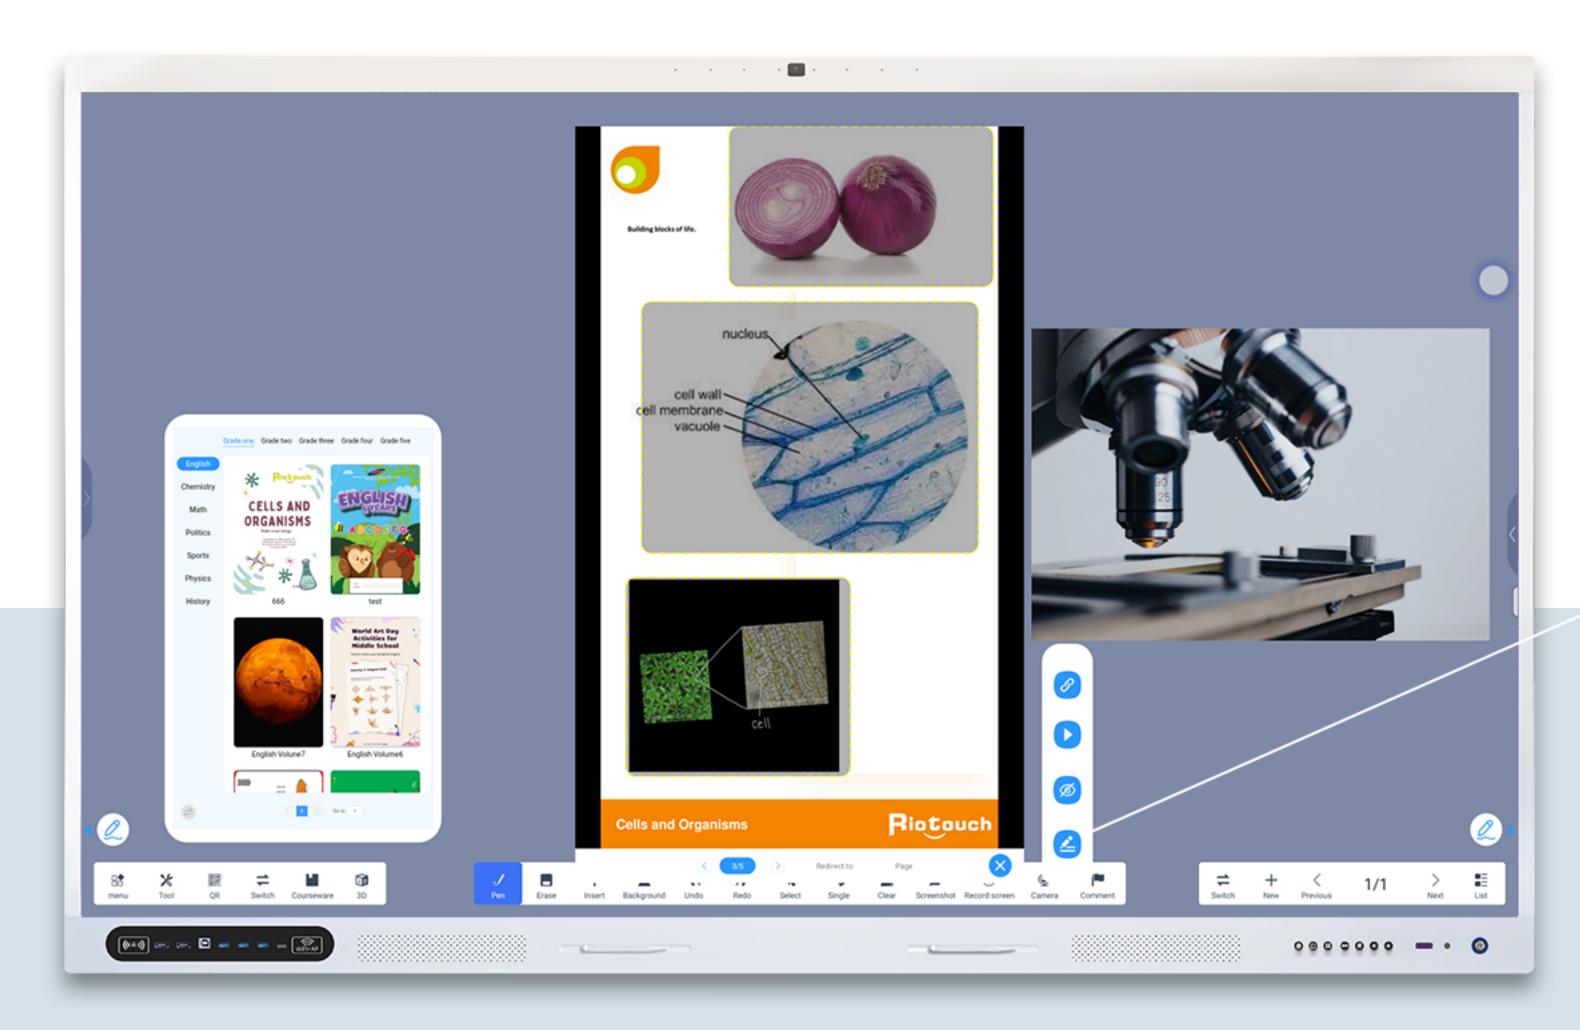


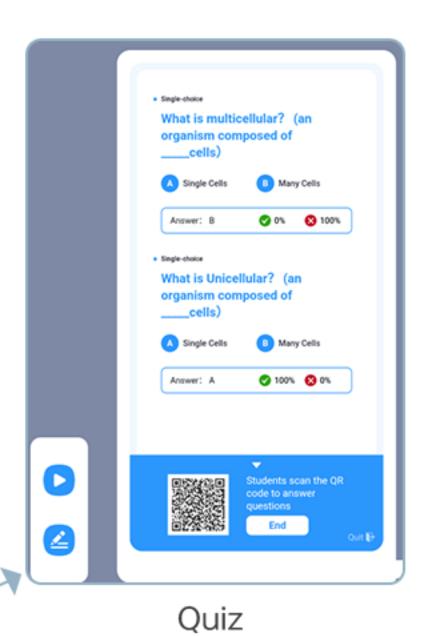

From primary to higher education, our platform, covers a wide range of subjects, igniting curiosity and fostering deep understanding. Customize your curriculum, create dynamic content, and contribute to a learning revolution that transforms teaching and empowers learners to achieve more."


Courseware Function-Ucourse


RK3588: The Core of Your 3D Vision Transform Ideas into Reality

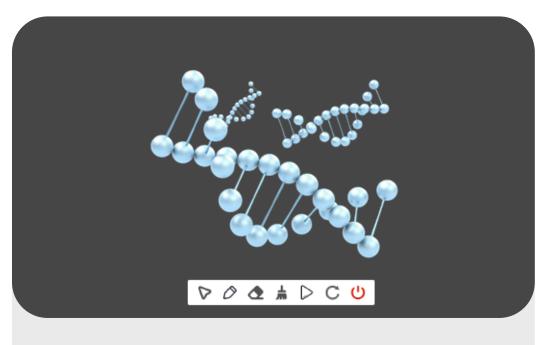

Natural Sciences


Anatomy and Physiology
Geography and Earth Sciences
Chemistry and Molecular Structure
Biology and Ecology
Astronomy and Space Science
Physics and Mechanics

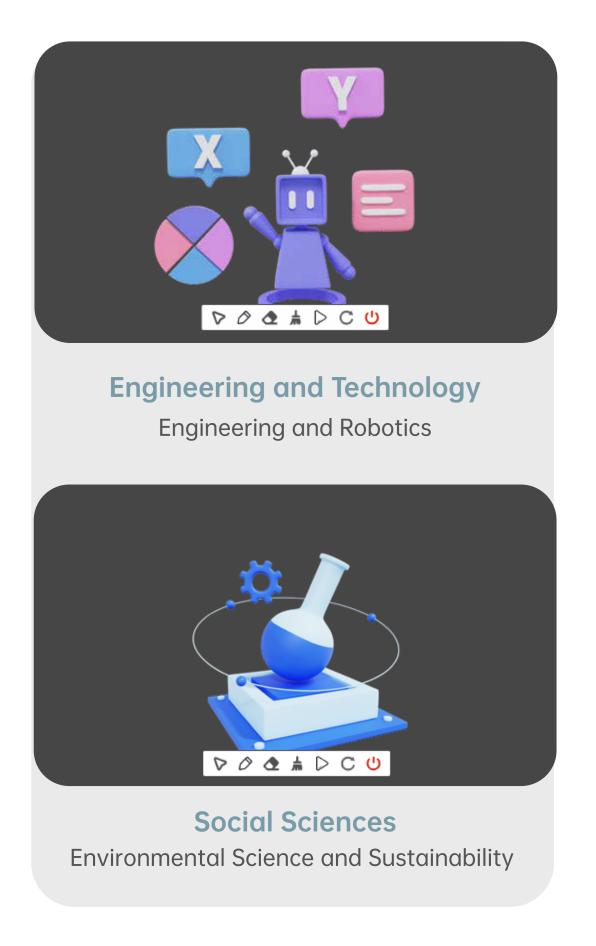


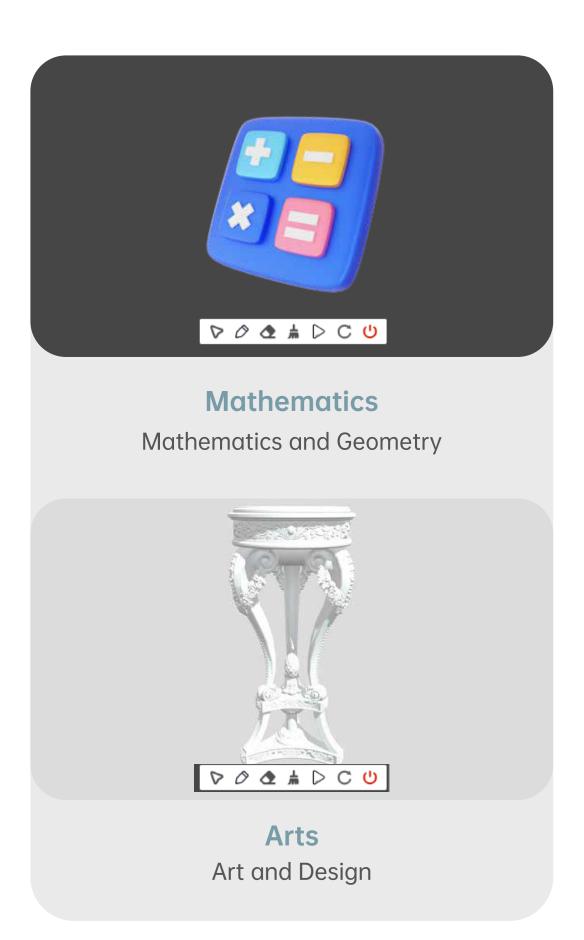


DMS-"Simplify, Streamline, Secure."

Secure your documents, smarten your management, and enjoy a seamless experience, all in one unified platform."

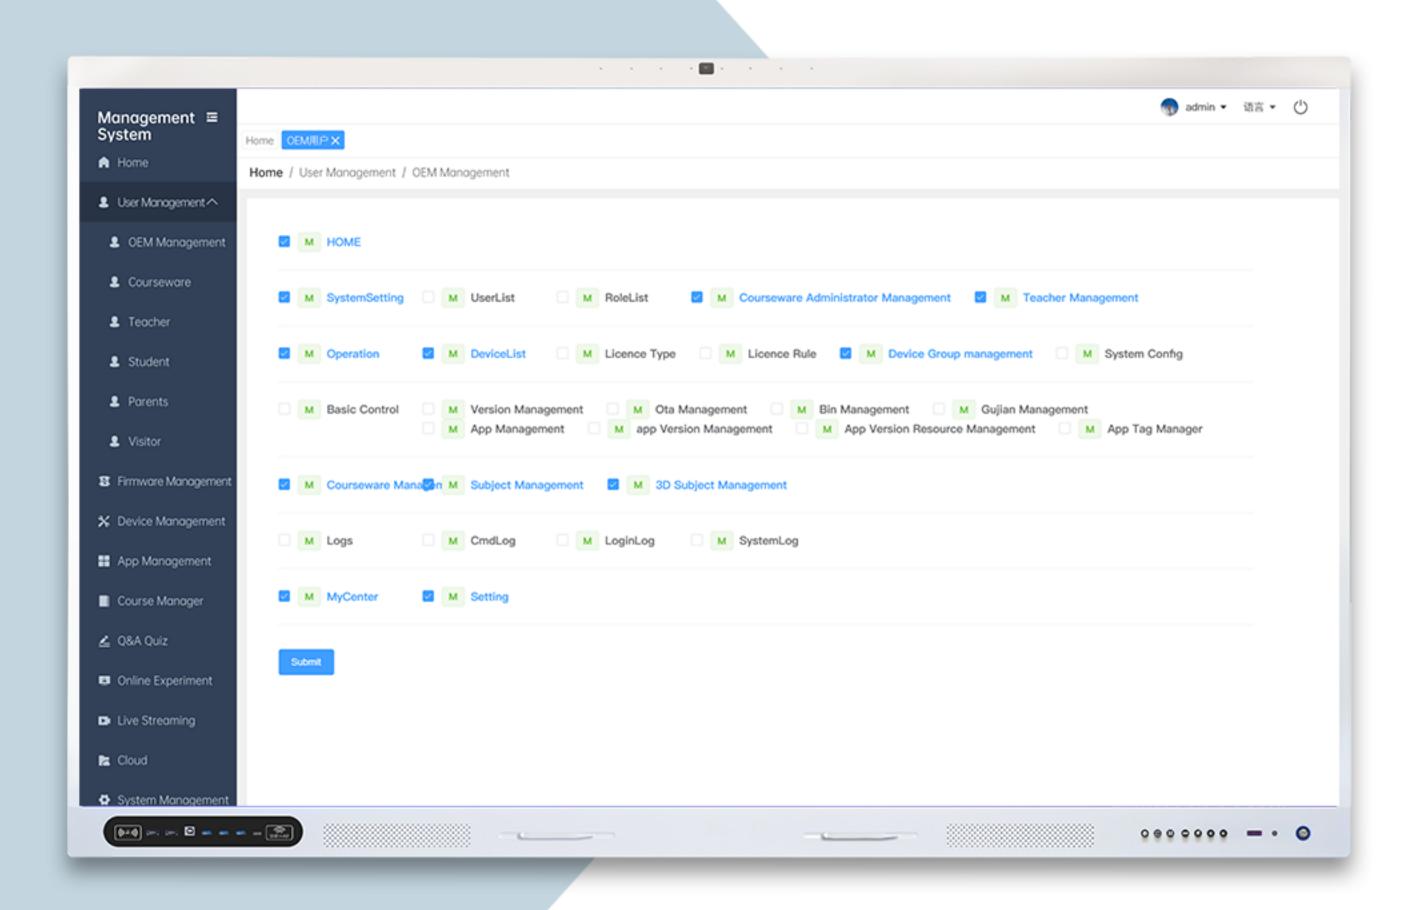

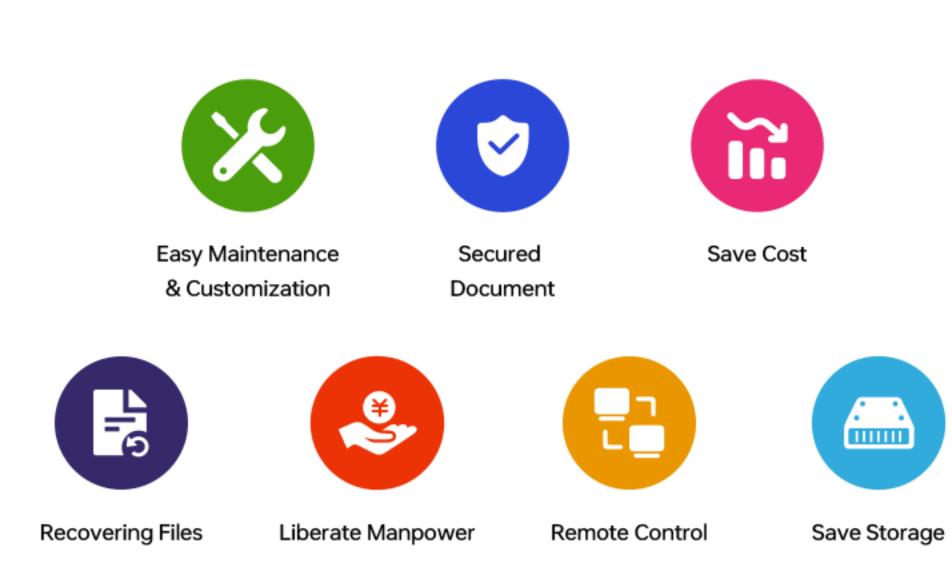

DMS

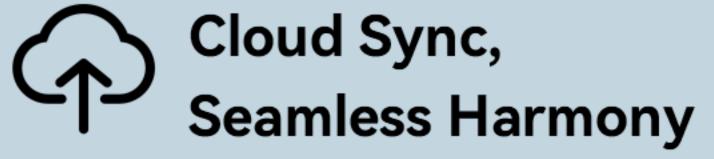


"Experience cloud sync like never before. Our service harmonizes with Google,OneDrive, and more, uniting all your data in perfect sync."


Secure, Smart, and Social Cloud



"Secure your data, smarten your access, and socialize your cloud experience. Our service supports Google, OneDrive, and more for a truly social cloud."

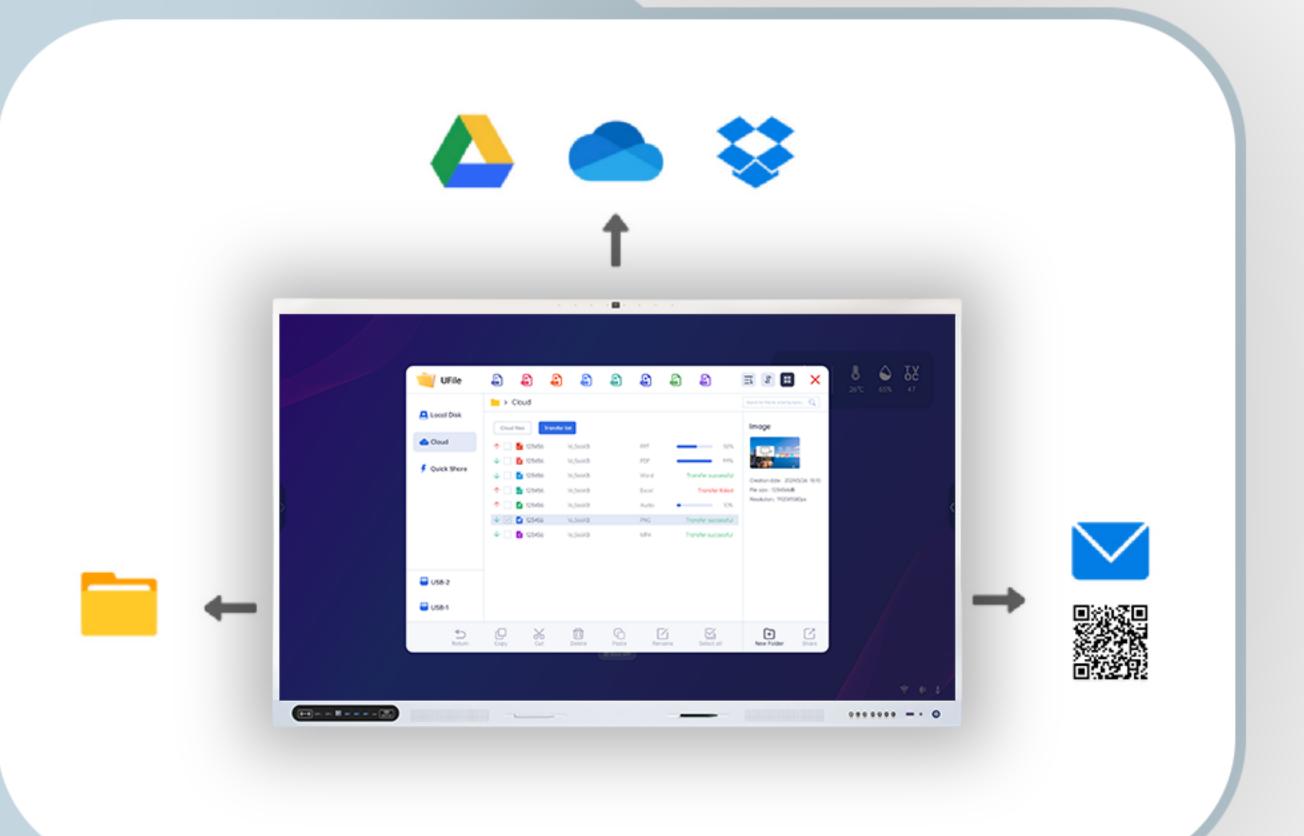

Multiple user login

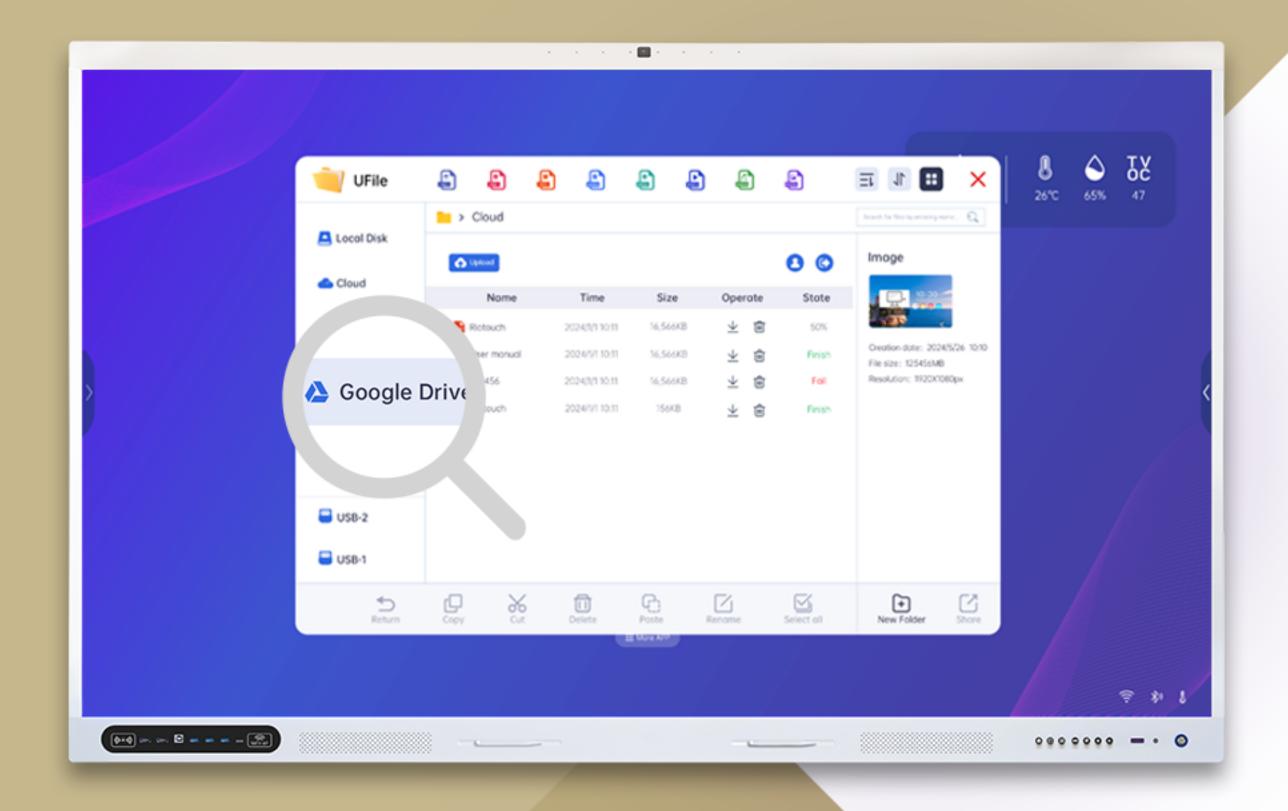


Beyond the Drive, Into the Cloud

- Step beyond the drive and into the cloud with our service.
- Multi-user functionality meets Google, OneDrive, and other cloud giants.

The Power of Now, In Every Update

Feel the power of now with every **OTA** update.

Immediate,impactful,and always improving.

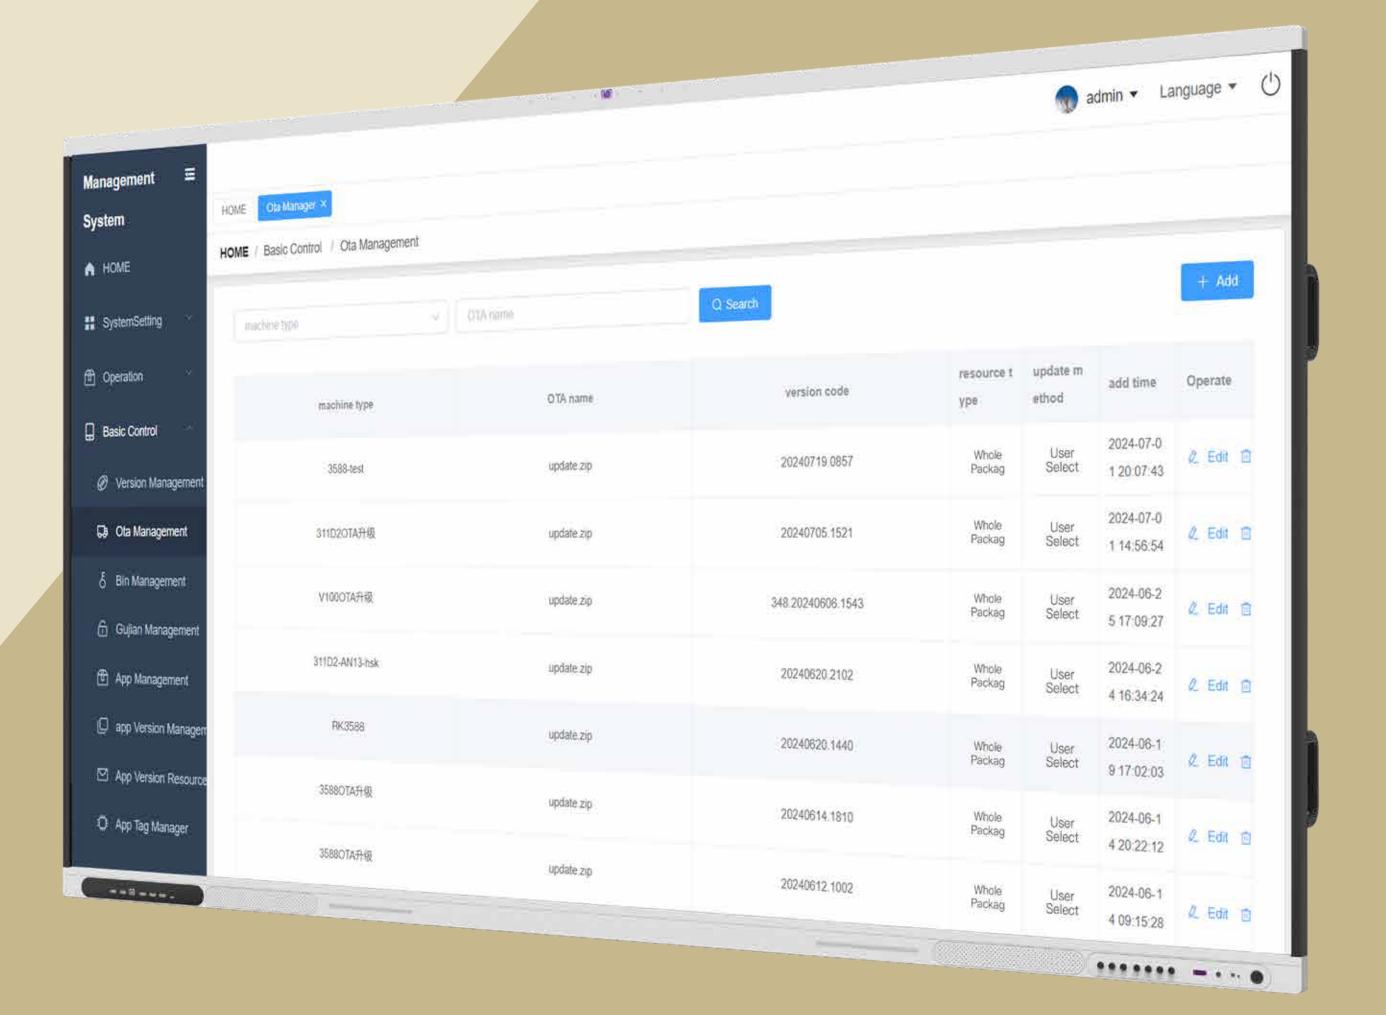

IR Touch Interactive Flat Panel Display-RK3588



NEWHUB SMART IR Touch Interactive Flat Panel Display

Model		NB-65RK3588-H01	NB-75RK3588-H01	NB-86RK3588-H01
Product picture	08:16 _m Street for the control of			
		Display specification		
Diagonal display size		65(inch)	75(inch)	86(inch)
Bezel color	Aluminum frame(White color)	V	7	7
Panel type	Ultra HD Direct type LED	√	√	√
Active area (mm)	2010421701701	1428.48 (H) * 803.52 (V)	1649.66 * 927.93(V)	1895.04 * 1065.96(V)
Resolution	3840*2160/60hz	0.272	0.420 0.420	V 4025 0.4025
Pixel Pitch Hardness Glass	Mohs-7 level	0.372mm x 0.372mm	0.429 mm x 0.429 mm	0.4935 mm x 0.4935 mm
Glass Panel	Anti-Glare glass with zero bonding	7	J	7
Aspect Ratio	16:9	,	,	
Contrast Ratio	1200:1 (type)	V	į į	,
Dynamic Contrast Ratio	4000:1	1	√	V
Brightness	over 350cd/m2	√	V	V
Color depth	1.07 billion colors	V,	V	V
Viewing angle	178°	V	V	V.
Lifespan	50,000 hours	V	٧	٧
T 1 T 1	Th tour d	Touch Type		-1
Touch Technology Multi Touch	IR touch Max 40 points(Windows)	7	V V	
Multi Writing	Max 40 points(Windows) Max 20 points(Windows)	<u> </u>	j j	7
Touch Precision	1 mm (over 90% Area)	,	j	,
Auto-Calibration	Yes	,	,	,
Anti-light	Yes	√	V	V
Minimum object size	2mm	V	√	V
Touch Response Time	First Point <2 ms, Continuation <8 ms	√	V	√
Supporting OS	Windows 7/8/10/11; Android; Mac; Linux; Chrome OS	√	√	√
	US US	Sound		
Front Speakers	15W*2(20W*2)	<u>√</u>	V	<u>√</u>
Subwoofer	20W*1	V	V	V
Total Power Amplifiers	≦60w	Microphone (option)	٧	V
Type	Wide-area microphones	Viterophone (option)	J	J
Number of Microphones	8	,	j	,
Auto switch		,	,	,
(Windows/Central)	Yes	√	√	√
Disconnectable	Yes	V	V	V
		camera (option)		
Number of images	4800M	V	V	V
Maximum resolution and	4208*3120(30fps)	√	√	√
frame rate		-1		.1
FOV(field of view)	120 °	Front Side Connections	V I	V
Front Ports	I	Type-C * 1 line; HDMI IN * 3 line;	USB3 0*2: USB-R*1	
Front Keys	Power	on/off; Signal source; Setting; ECO; N	fenu; Volume down; Volume up	
NFC		, , , , , , , , , , , , , , , , , , ,	,	
Fingerprint		√		
		Bottom Side Connections		
Earphone	1	· · · · · · · · · · · · · · · · · · ·	V	· · · · · · · · · · · · · · · · · · ·
MIC IN	1	V	V	.1
SPDIF OUT RS232	1	N	N J	N
Touch USB (USB B)	2	J	v J	
HDMI IN	1	7	,	7
HDMI OUT	<u>;</u>	j	j j	,
RJ45	i	į	į į	,
TYPE C OUT	1		V	√ ·
Android USB2.0	1	1	V	1
Android USB3.0	1	V	V	V
TF CARD	1	V	V	V
WIFI	WIFI5+WIFI6+AP	V	V,	V
Windows OPS Slot	80-pins OPS slot	V	V	V
Blue tooth version	5.2	Control	٧	٧
Android Version	Android 13.0	Central	J 1	V
Android version	Rockchip RK3588	v J	v d	
Chip	Rookohin D v 15 VV			

	quad-core Cortex-A76 and quad-core Cortex-A55,		1				
CPU	up to 2.4GHz	V	√	√			
GPU	Mali-G610 MC4	J	V	J			
RAM	8GB 16GB 32GB DDR4		,	J			
Flash	128GB 256GB		,	J			
Compliant with	Windows; Mac; Linux; Chrome OS		1	1			
Over-the-Air Updates	windows, Mac, Linux, Chrome OS	•	Y	· ·			
(OTA)	YES	V	√	√			
Light Sensor	YES	J	V	J			
NFC Reader/Writer	YES		1	J			
	1E3	•	*	,			
Temperature, humidity and		,		,			
air quality three-in-one	YES	V	√	√			
sensor							
Fingerprint module	YES	V	\checkmark	√			
General Information							
Power Supply	~ 100-240 V (50/60Hz)	V	√	√			
Switch On / Off	Yes	V	√	√			
Standby Energy	≤ 0.5 Watt	1	1	1			
Consumption	≤0.5 Watt	•	٧	•			
Power Consumption		Maximun< 290W	Maximun< 320W	Maximun < 350W			
Power Consumption		Eco<75W	Eco<75W	Eco<75W			
Net Weight	(KG±2)	45	55	70			
Gross Weight	(KG±2)	55	68	85			
Screen Dimensions	(WxDxH)	1470.9 *97.5* 897.5 mm	1692.1 *97.5*1021.9 mm	1943.4*97.5*1166 mm			
Dimensions Package	(WxDxH)	1622 * 190 * 1038 mm	1842 *190 * 1163 mm	2090 *190 * 1307 mm			
VESA Standard	(mm)	600*400 mm	600*400 mm	800*600 mm			
Certifications	CE: EMC + LVD / RoHS / REACH / FCC/CCC						
	ONE year for the whole product and THREE years for						
Warranty	touch parts by default. (can be extended, it's for an	√	√	√			
	option)						
Environmental conditions							
Operating Temperature	0°C - 40°C/32 - 100 °F	V	\checkmark	√			
Storage Temperature	-20°C - 60°C/-4 - 140 °F	V	√	√			
Storage Humidity	10 % - 90 %	V	√	√			
Usage Humidity	10 % - 90 %	V	√	√			
Accessories							
Accessories	WIFI antenna*5 pcs; No ink pen * 2pcs, Remote control *1pcs, 1.5m power cord *1pcs, 1.5m HDMI cable *1pcs, 1.5m USB touch cable *1pcs; wall mount kit						